

# TUPP

LONG NYLON THROUGH ANCHOR FOR HEAVY DUTY FIXINGS  
CHEVILLE TRAVERSANTE PROLONGÉE EN NYLON POUR CHARGES LOURDES

The perfect mix between performance and versatility.

*Un mix parfait entre performances et usage universel.*

#### EFFECTIVE ANTIROTATION

Ensured by ribs and multiple wings

#### HAUTE EFFICACITÉ

Système anti-rotation grâce aux ailettes et nervures multiples

#### CONTROLLED EXPANSION

The locating groove in the plug ensures a correct positioning of the screw during installation

#### EXPANSION CONTRÔLÉE

Pendant la mise en place, la vis reste dans une position correcte, grâce au profil sinusoïdal de la fente de la cheville

#### LARGE FIXING THICKNESS

Ø16 mm, lengths up to 240 mm and special screw with built in washer




#### EPAISSEURS À FIXER IMPORTANTES

Ø 16 mm., jusqu'à 240mm de long et vis spéciale avec rondelle intégrée



# TUPP Long nylon through anchor for heavy duty fixings / Cheville prolongée en nylon pour fixations lourdes

- concrete / béton
- solid brick / brique pleine
- honeycomb brick / brique semi-pleine
- cell like clay brick / brique creuse
- light weight honeycomb brick / bloc creux Poroton
- hollow dense aggregate block / bloc creux béton
- hollow light aggregate block / bloc creux Leca
- aerated concrete / béton cellulaire
- solid stone / pierre solide

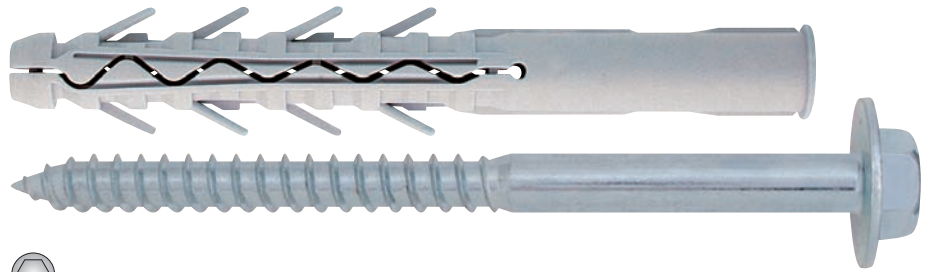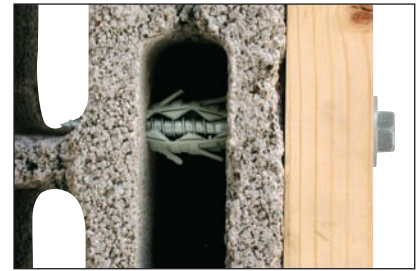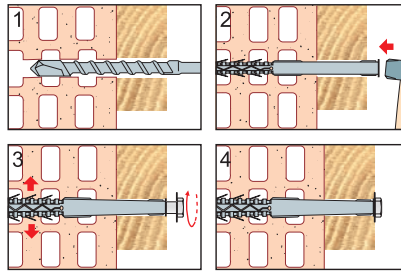

Hex head screw  
with built-in washer Ø34  
white zinc plated

**Vis T.H.**  
avec rondelle intégrée Ø34  
zingué blanc



Code	Plug Cheville Ø x L	Screw Vis Ø x L	Fixing thickness Epaiss. fixable max	Box q.ty Boîte de
64001b16140	16x140	12x150	45	25
64001b16160	16x160	12x170	65	25
64001b16200	16x200	12x210	105	25
64001b16240	16x240	12x250	145	25